
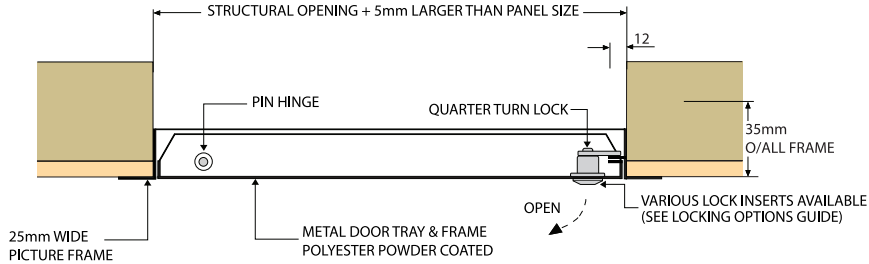


APD.MD.PF/B1
BUDGET - CEILING/WALL ACCESS PANEL - METAL DOOR WITH 25mm PICTURE FRAME


SPECIFICATION

DESCRIPTION	Metal Door - Picture Frame.
FIRE RATING	Non Fire - Rated, made from wholly non-combustible materials.
HINGE TYPE	Pin Hinge.
COMPOSITION	Removable Flush Metal Faced Door. 1.0mm Thick Zintec Steel Frame. 1.0mm Thick Zintec Steel Door Tray. Polyester Powder Coated in matt white RAL 9010 20% gloss.
LOCKING	Quarter turn cam lock.
FITTING	Screw fix through the frame into a suitable trimming.
FRAME TYPE	25mm Picture frame for retrofit.

LOCKING OPTIONS



QUARTER TURN
KEY LOCK

DIMENSIONS

Please ensure that on installation of the access panel, the actual size of structural opening in the wall/ceiling needs to be 5mm larger than the overall panel size e.g. structural opening for 600 x 600 will be 605 x 605 (See sizes below).

Sizes		Structural Opening		Clear Opening with Door Removed	
(x)	(y)	(x)	(y)	(x)	(y)
150	150	155	155	138	138
200	200	205	205	188	188
300	300	305	305	288	288
450	450	455	455	438	438
600	600	605	605	588	588

Bespoke sizes are also available

FITTING INSTRUCTIONS

Note: the access panel may require extra support and bracing to allow safe operation.

- Insert frame into structural opening which needs to be 5mm larger than panel size, ensuring frame is flush with surface. Then screw fix through fixing points. Additional packers may be needed to prevent distortion of the frame. DO NOT fix through the face of frame.

- Doors can be removed from the frame by the bolts securing the hinge.

- Simple to operate: remove the plastic plug, insert the Key into the budget lock and rotate 90 degrees. Ensure there is sufficient clearance for the lock to operate correctly.

Refit the door and check operation. Ensure there is sufficient clearance behind the frame for the budget lock to operate correctly.